SONGRI
Electric

SINCE 1996

ZHEJIANG SONGRI ELECTRIC CO., LTD.

ADD: NO.389 Jinhai Road,Wenzhou Economic And Technological Development zone,Zhejiang Province,China(325000)

TEL:+86 577 - 85222808 85222288

E-mail:trade.b@songri.com

https://www.songri.com

SONGRI Electric

2023

SONGRI
Electric

PRODUCT SHOW

Mix and Match ◀
switches & sockets

Science and technology light up life!
Our switches and sockets are all over the world

2023

Brief Introduction

Zhejiang Songri Electric Co.,Ltd. is located at Wenzhou Economic And Technological Development zone, which is a beautiful area with advantages in geography and convenience in transportation. Our company is a high tech company specializing in researching and manufacturing various Kinds of electric products with the ability of manufacturing in large quantity.Moreover, Our company has a group of seasoned and professional technological and management employees.

Zhejiang Songri Electric Co.,Ltd. was originated in 1996. On the basis of honest management, our company hasKept being actively and bravely exploring and hard many years. At present, we can supply a wide range ofproducts such as home electric appliances, electrical lighting, high or low voltage items, electrical our marketnetwork covers all over China. Furthermore, our products have been sold to many countries around the world.

Our company has obtanined ISO 9001:2015, ISO 14001:2015, ISO 45001:2018, NF, SAA, SASO, VDE, CE as well as lnternational Electric Committee CB certificates.

Our company will strive without ceasing just as we have done at past, and will Keep forward for building the monument or world-class electric industry in China. We welcome all persons with lofty ideas to join Songri so that wel create a beautiful future together.

Open efficient cooperative and win-win

Excellence comes from teamwork,success comes from cooperation, People adhering to the “fine and rigorous, pragmatic and innovativespirit, with a broad mind, tolerance of mind, and win - win concept, sincere cooperation with customers, long - term cooperation, the depth of cooperation.

COMPANY HONOR

- High quality materials
- Rigorous quality control
- Attention to detail
- Customer first

STA SERIES

Flame Retardant
Stronger high temperature than general material
Strong corrosion resistance

Temperature 850 Degrees,
away from the fire 30 seconds, automatically put out,
protect the whole family electricity safety

Beautiful style & simple design

Decorative pattern with pure flat panel and square decoration

Super silver point

Fire retardant

Super insertion force

Lager wiring apace

16A 250V~
1 GANG 1 WAY SWITCH
1 GANG 2 WAY SWITCH

16A 250V~
2 GANG 1 WAY SWITCH
2 GANG 2 WAY SWITCH

16A 250V~
3 GANG 1 WAY SWITCH
3 GANG 2 WAY SWITCH

16A 250V~
2 PIN SOCKET



20A 125/250V~
SOCKET

15A 110/250V~
2 PIN SOCKET WITH
AMERICAN SOCKET



13A 250V~
MULTI SOCKET



13A 250V~
DOUBLE MULTI SOCKET



16A 250V~
DOUBLE THAI SOCKET



15A 110/250V~
DOUBLE AMERICAN
SOCKET

16A 250V~
2 PIN SOCKET WITH
1 SWITCH WITH NEON



16A 250V~
2 SWITCH WITH NEON

15A 250V~
AMERICAN SOCKET
WITH 1 SWITCH

16A 250V~
DOUBLE 2 PIN SOCKET
WITH 1 SWITCH

13A 250V~
MULTI SOCKET WITH
1 SWITCH

TV SOCKET



DOUBLE TV SOCKET

TEL SOCKET

COMPUTER SOCKET

DOUBLE TEL SOCKET

DOUBLE COMPUTER
SOCKET

TV+TEL

TV+COMPUTER

15A 110/250V~
2 PIN SOCKET+AMERICAN
SOCKET WITH TV SOCKET

STB SERIES

COLOR:WHITE&BLACK

MATERIAL: PC+COPPER

Beautiful style & simple design

Decorative pattern with pure flat panel and square decoration

Super silver point

Fire retardant

Super insertion force

Lager wiring apace

16A 250V~
1 Gang 1 Way Switch

16A 250V~
1.5 Gang 1 Way Switch

16A 250V~
3 Gang 1 Way Switch

16A 250V~
1 Gang 2 Way Switch

16A 250V~
1. 5 Gang 2 Way Switch

16A 250V~
3 Gang 2 Way Switch

TV Common socket

3.1A 5V~
2/3 Double USB Socket

16A 250V~
Bell Switch

TV Network socket

16A 250V~
Grounding single
socket with shutter

16A 250V~
Grounding double
socket with shutter

Telephone RJ11 socket

16A 250V~
Grounding single
socket with shutter



16A 250V~
Grounding double
socket with shutter

Computer RJ45 socket

300W Light Dimmer

16A 250V~
1 Gang 1 Way Switch

1G cover plate

16A 250V~24mm
4 Gang 1 Way Switch

16A 250V~
1. 5 Gang 1 Way Switch

1.5G cover plate

16A 250V~36mm
4 Gang 1 Way Switch

16A 250V~
3 Gang 1 Way Switch

2 in 3G cover plate
no space

16A 250V~
2 Gang 1 Way Switch

3G cover plate no space

16A 250V~24mm
6 Gang 1 Way Switch

16A 250V~
3 Gang 1 Way Switch

2G cover plate with
space

16A 250V~
2 Gang 1 Way Switch(36mm)

6G cover plate
no space

16A 250V~36mm
DOUBLE THAI
SOCKET WITH
2 SWITCH

16A 250V~
Grounding double socket
with shutter

4G cover plate with
space

16A 250V~
1 Gang 1 Way Switch

16A 250V~
1.5 Gang 1 Way Switch

16A 250V~
3 Gang 1 Way Switch

16A 250V~
1 Gang 2 Way Switch

16A 250V~
1. 5 Gang 2 Way Switch

16A 250V~
3 Gang 2 Way Switch

TV Common socket

3.1A 5V~
2/3 Double USB Socket

16A 250V~
Bell Switch

TV Network socket

16A 250V~
Grounding single
socket with shutter

16A 250V~
Grounding double
socket with shutter

Telephone RJ11 socket

16A 250V~
Grounding single
socket with shutter

16A 250V~
Grounding double
socket with shutter

Computer RJ45 socket

300W Light Dimmer

16A 250V~
1 Gang 1 Way Switch

1G cover plate

16A 250V~24mm
4 Gang 1 Way Switch

16A 250V~
1. 5 Gang 1 Way Switch

1.5G cover plate

16A 250V~
3 Gang 1 Way Switch

2 in 3G cover plate
no space

16A 250V~36mm
4 Gang 1 Way Switch

16A 250V~
2 Gang 1 Way Switch

3G cover plate no space

16A 250V~24mm
6 Gang 1 Way Switch

16A 250V~
3 Gang 1 Way Switch

2G cover plate with
space

16A 250V~
2 Gang 1 Way Switch(36mm)

6G cover plate
no space

16A 250V~36mm
DOUBLE THAI
SOCKET WITH
2 SWITCH

16A 250V~
Grounding double socket
with shutter

4G cover plate with
space

STC SERIES

Flame Retardant
Stronger high temperature than general material
Strong corrosion resistance

Temperature 850 Degrees,
away from the fire 30 seconds, automatically put out,
protect the whole family electricity safety

16A 250V~
1 GANG 1 WAY SWITCH
1 GANG 2 WAY SWITCH

16A 250V~
2 GANG 1 WAY SWITCH
2 GANG 2 WAY SWITCH

16A 250V~
3 GANG 1 WAY SWITCH
3 GANG 2 WAY SWITCH

16A 250V~
2 PIN SOCKET



20A 125/250V~
SOCKET

15A 110/250V~
2 PIN SOCKET WITH
AMERICAN SOCKET



13A 250V~
MULTI SOCKET



13A 250V~
DOUBLE MULTI SOCKET



16A 250V~
DOUBLE THAI SOCKET



15A 110/250V~
DOUBLE AMERICAN
SOCKET



16A 250V~
2 PIN SOCKET WITH
1 SWITCH WITH NEON



16A 250V~
2 SWITCH WITH NEON

15A 250V~
AMERICAN SOCKET
WITH 1 SWITCH

16A 250V~
DOUBLE 2 PIN SOCKET
WITH 1 SWITCH

13A 250V~
MULTI SOCKET WITH
1 SWITCH

TV SOCKET



DOUBLE TV SOCKET

TEL SOCKET

COMPUTER SOCKET

DOUBLE TEL SOCKET

DOUBLE COMPUTER
SOCKET

TV+TEL

TV+COMPUTER

15A 110/250V~
2 PIN SOCKET+AMERICAN
SOCKET WITH TV SOCKET

PH Series

Beautiful style & simple design

Decorative pattern with pure flat panel and square decoration

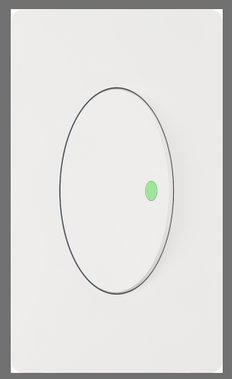

16A 250V~
1 GANG 1 WAY SWITCH
1 GANG 2 WAY SWITCH

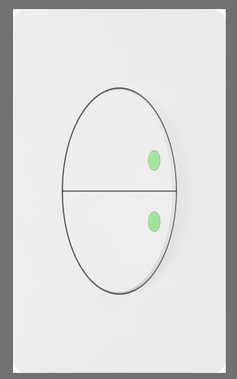

16A 250V~
2 GANG 1 WAY SWITCH
2 GANG 2 WAY SWITCH

16A 250V~
BELL SWITCH

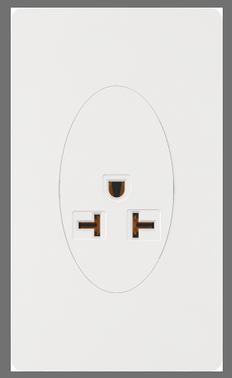

20A 125/250V~
SOCKET

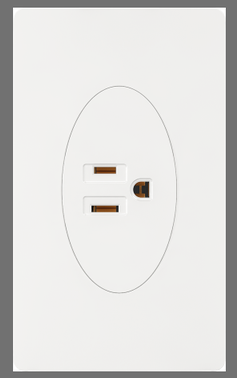

15A 110/250V~
AMERICAN SOCKET

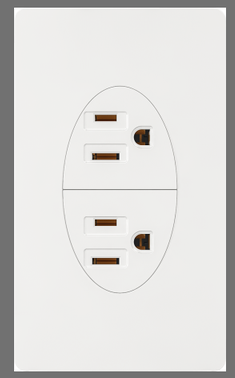

16A 250V~
DOUBLE AMERICAN SOCKET

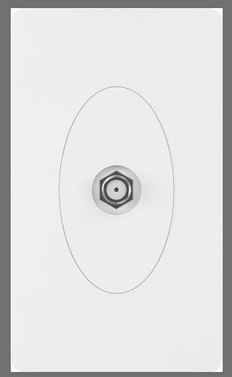

TV SOCKET

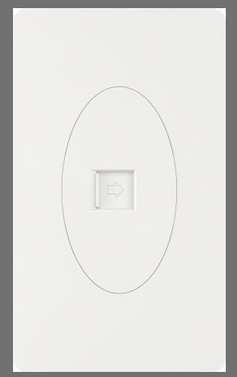

TEL SOCKET

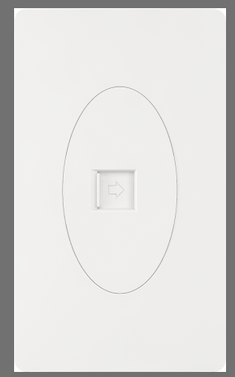

COMPUTER SOCKET

MI Series

Beautiful style & simple design

Decorative pattern with pure flat panel and square decoration

Super silver point

Fire retardant

Super insertion force

Lager wiring apace



16A 250V~
1 GANG 1 WAY SWITCH
1 GANG 2 WAY SWITCH



16A 250V~
2 GANG 1 WAY SWITCH
2 GANG 2 WAY SWITCH



16A 250V~
2 GANG 1 WAY SWITCH
2 GANG 2 WAY SWITCH



16A 250V~
3 GANG 1 WAY SWITCH
3 GANG 2 WAY SWITCH



16A 250V~
3 GANG 1 WAY SWITCH
3 GANG 2 WAY SWITCH



16A 250V~
4 GANG 1 WAY SWITCH
4 GANG 2 WAY SWITCH



16A 250V~
5 GANG 1 WAY SWITCH
5 GANG 2 WAY SWITCH

16A 250V~
6 GANG 1 WAY SWITCH
6 GANG 2 WAY SWITCH



16A 250V~
DOUBLE 2 pin socket



16A 250V~
THREE 2 pin socket



16A 250V~
DOUBLE THAI SOCKET



16A 250V~
DOUBLE MULTI SOCKET

16A 250V~
MULTI SOCKET WITH
1 SWITCH

16A 250V~
DOUBLE 2 SOCKET
WITH SWITCH



16A 250V~
DOUBLE 2 SOCKET
WITH 2 SWITCH

16A 250V~
MULTI SOCKET WITH
2 SWITCH

TV SOCKET

TEL SOCKET

COMPUTER SOCKET

Bell Push Water Proof

A70 SERIES

Flame Retardant
Stronger high temperature than general material
Strong corrosion resistance

Temperature 850 Degrees,
away from the fire 30 seconds, automatically put out,
protect the whole family electricity safety

16A 250V~
1 GANG 1 WAY SWITCH
1 GANG 2 WAY SWITCH

16A 250V~
2 GANG 1 WAY SWITCH
2 GANG 2 WAY SWITCH

16A 250V~
3 GANG 1 WAY SWITCH
3 GANG 2 WAY SWITCH

16A 250V~
2 PIN SOCKET

16A 250V~
4 PIN SOCKET

16A 250V~
DOUBLE THAI SOCKET

USB SOCKET

TV SOCKET

TEL SOCKET OR
COMPUTER SOCKET

16A 250V~
DOUBLE THAI SOCKET
WITH SWITCH

16A 250V~
6 PIN SOCKET WITH
SWITCH

16A 250V~
3 GANG SWITCH WITH
TV WITH TEL SOCKET
WITH USB

A70 SERIES Function&Cover

16A 250V~24mm
1 GANG 1 WAY SWITCH
1 GANG 2 WAY SWITCH
FUNCTION

16A 250V~24mm
2 PIN SOCKET FUNCTION

24mm
USB FUNCTION

24mm
TV SOCKET
FUNCTION

24mm
TEL SOCKET OR
COMPUTER SOCKET
FUNCTION

16A 250V~72mm
3 GANG 1 WAY SWITCH FUNCTION



16A 250V~72mm
DOUBLE THAI SOCKET FUNCTION

24mm
1 GANG PLATE COVER

24mm
2 GANG PLATE COVER

72mm
3 GANG PLATE COVER

72mm
6 GANG PLATE COVER

A60 SERIES

16A 250V~
1 GANG 1 WAY SWITCH
1 GANG 2 WAY SWITCH



16A 250V~
2 GANG 1 WAY SWITCH
2 GANG 2 WAY SWITCH



16A 250V~
3 GANG 1 WAY SWITCH
3 GANG 2 WAY SWITCH



16A 250V~
2 PIN SOCKET



16A 250V~
DOUBLE THAI SOCKET



16A 250V~
DOUBLE THAI SOCKET
WITH SWITCH

24mm
1 GANG PLATE COVER



24mm
2 GANG PLATE COVER

72mm
3 GANG PLATE COVER

72mm
6 GANG PLATE COVER

AU Series

Beveled mirror reflection

Flame Retardant
Stronger high temperature than general material
Strong corrosion resistance

Temperature 850 Degrees,
away from the fire 30 seconds, automatically put out,
protect the whole family electricity safety

10AX250V~
1 GANG 1 WAY SWITCH
1 GANG 2 WAY SWITCH

10AX250V~
2 GANG 1 WAY SWITCH
2 GANG 2 WAY SWITCH

10AX250V~
3 GANG 1 WAY SWITCH
3 GANG 2 WAY SWITCH

10AX250V~
4 GANG 1 WAY SWITCH
4 GANG 2 WAY SWITCH

10AX250V~
5 GANG 1 WAY SWITCH
5 GANG 2 WAY SWITCH

10AX250V~
6 GANG 1 WAY SWITCH
6 GANG 2 WAY SWITCH

10AX250V~
3 pin socket with 1 switch



10AX250V~
3 pin socket with 2 switch

10AX250V~
6 pin socket with 2 switch

10AX250V~
6 pin socket with 2 switch
with 2 USB

10AX250V~
6 pin socket with 3 switch

Tel socket

10AX250V~
1 GANG 1 WAY SWITCH
1 GANG 2 WAY SWITCH

10AX250V~
2 GANG 1 WAY SWITCH
2 GANG 2 WAY SWITCH

10AX250V~
3 GANG 1 WAY SWITCH
3 GANG 2 WAY SWITCH

10AX250V~
4 GANG 1 WAY SWITCH
4 GANG 2 WAY SWITCH

10AX250V~
5 GANG 1 WAY SWITCH
5 GANG 2 WAY SWITCH

10AX250V~
6 GANG 1 WAY SWITCH
6 GANG 2 WAY SWITCH

Computer socket

TV SOCKET

Light dimmer switch

Flame Retardant
Stronger high temperature than general material
Strong corrosion resistance

Temperature 850 Degrees,
away from the fire 30 seconds, automatically put out,
protect the whole family electricity safety

Super silver point

Fire retardant

Super insertion force

Lager wiring apace

12mm 10AX250V~
1 gang 1 way switch

24mm 16AX250V~
1 gang 1 way switch

24mm 16AX250V~
4 Direction switch

24mm
Heater switch

12mm 10AX250V~
1 gang 1 way switch

24mm 16AX250V~
1 gang 1 way switch

24mm 16AX250V~
1 gang 1 way switch with lamp

24mm 16AX250V~
1 gang 2 way switch

24mm 16AX250V~
1 gang 2 way switch with lamp

24mm 16AX250V~
4 Direction switch

24mm 20A 250V~
Heater switch

24mm 16AX250V~
Bell switch

24mm 16AX250V~
1 gang 1 way switch

24mm 16AX250V~
1 gang 2 way switch

24mm 16AX250V~
1 gang 1 way with lamp

24mm 16AX250V~
1 gang 2 way with lamp

24mm 16AX250V~
4 Direction switch

24mm 20A 250V~
Heater switch

24mm 16AX250V~
Bell switch

24mm 16A 250V~
Bell switch with lamp

24mm 16A 250V~
Manual curtain control switch
Auto curtain control switch

24mm 5A 250V~
Pulling switch

24mm 16A 250V~
2 Pin socket

12mm 10A 250V~
2 Pin socket

24mm 16A 250V~
2 P+E Italian socket

24mm 500W
250V~ Light Dimmer
250V~ Fan Dimmer

24mm
TEL socket
Computer socket

24mm
SAT. TV socket

24mm
TV socket

24mm blank plate

12mm blank plate

48mm
Audio & Video socket

24mm
Buzzer switch

24mm 250V~
Neon light(green)

24mm
Night lamp switch

48mm 10A 250V~
Multi Function socket

48mm 16A 250V~
2P+E 'Schuko' socket

48mm 250W/500W/1000W
Light Dimmer switch
250V~ Fan Dimmer switch

48mm
Double USB

48mm
Night lamp switch

SMEA series



Water proof cover

SMEB series





All function can match all cover

SMED series

1 GANG COVER

2/3 GANG COVER

2 GANG COVER

3 GANG COVER

4 GANG COVER

6 GANG COVER

SMEE series



3 GANG COVER

4 GANG COVER

6 GANG COVER

SMEL series



3 GANG COVER

4 GANG COVER

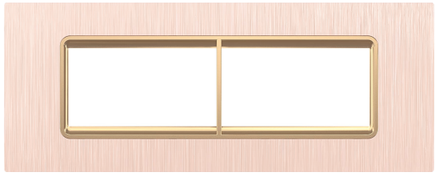

6 GANG COVER

SMEC series





2 gang water proof box

3 gang water proof box

2 gang water proof box (flat)

3 gang water proof box (flat)

Stair timer

Water proof cover

24mm 16AX250V~
1 gang 1 way switch

24mm 16AX250V~
1 gang 2 way switch

24mm 16AX250V~
4 Direction switch

18mm 16AX250V~
1 way switch

48mm
A/C switch 45A

24mm 16A 250V~
Door bell switch with lamp

24mm 20A 250V~
Heater switch

72mm 16A 250V~
1 gang 1 way switch
1 gang 2 way switch

24mm 16A 250V~
2 pin socket

36mm 16A 250V~
2P E Schuko socket

36mm 13A 250V~
Multifunction socket

24mm
Neon light

24mm
SAT. TV socket

24mm
Tel socket
Computer socket

24mm
TV socket

24mm
250W Light dimmer

24mm
Emergancy switch

24mm
Buzzer switch

12mm blank plate

24mm blank plate

SME-G Series

Plastic Cover & more color change
White/Ivory/Pink/Wooden/Violet/Red and so on.

SMEI series



SMEG series






SMEK series



Plastic Cover & more color change
White/Ivory/Pink/Wooden/Violet/Red and so on.

SMEJ series

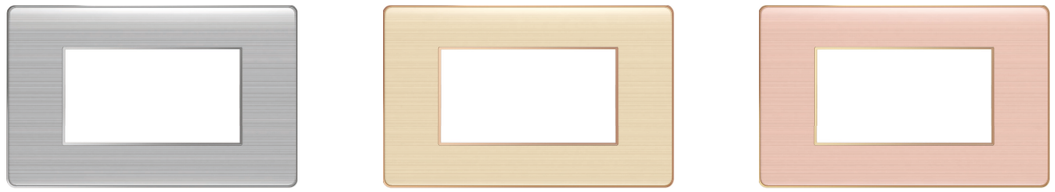

SMEH series

Plastic support



Steel support

Water proof cover

48mm
Fan control 250W

48mm
Light dimmer 500W

72mm
Night lamp

Plastic Cover & more color change
White/Ivory/Wooden and so on.

16Ax250V~24mm
1 GANG 1 WAY SWITCH
FUNCTION

16Ax250V~24mm
1 GANG 2 WAY SWITCH
FUNCTION

16Ax250V~24mm
1 GANG 1 WAY SWITCH
FUNCTION

16Ax250V~24mm
1 GANG 2 WAY SWITCH
FUNCTION

16Ax250V~24mm
2 GANG 1 WAY SWITCH
FUNCTION

16Ax250V~24mm
CURTAIN SWITCH
FUNCTION

16Ax250V~24mm
2 PIN SOCKET FUNCTION

16Ax250V~24mm
2 PIN SOCKET WITH EARTH
FUNCTION

16Ax250V~24mm
ITALIAN SOCKET FUNCTION

24mm
BLANK PLATE

16Ax250V~36mm
MULTI SOCKET FUNCTION



16Ax250V~36mm
GERMAN SOCKET FUNCTION

72mm
BLANK PLATE FUNCTION

24mm
BUZZER SWITCH FUNCTION

24mm
SAT.TV SOCKET FUNCTION

24mm
TEL SOCKET FUNCTION

24mm
COMPUTER SOCKET
FUNCTION

24mm
LIGHT DIMMER WITH USB
FUNCTION

24mm
LIGHT DIMMER FUNCTION

PLATE COVER

PLATE COVER

PLATE COVER



PLATE COVER



PLATE COVER

PLATE COVER

C1 Series

Beautiful style & simple design

Decorative pattern with pure flat panel and square decoration

Flame Retardant
Stronger high temperature than general material
Strong corrosion resistance

Temperature 850 Degrees,
away from the fire 30 seconds, automatically put out,
protect the whole family electricity safety

Super silver point

Fire retardant

Super insertion force

Lager wiring apace



16A 250V~
1 GANG 1 WAY SWITCH
1 GANG 2 WAY SWITCH



16A 250V~
2 GANG 1 WAY SWITCH
2 GANG 2 WAY SWITCH



16A 250V~
3 GANG 1 WAY SWITCH
3 GANG 2 WAY SWITCH



16A 250V~
4 GANG 1 WAY SWITCH
4 GANG 2 WAY SWITCH



BLANK PLATE



16A 250V~
2 SOCKET



13A 250V~
MULTI SOCKET



16A 250V~
3 SOCKET



13A 250V~
MULTI SOCKET WITH
2 SOCKET



16A 250V~
1 SOCKET WITH
1 SWITCH



13A 250V~
MULTI SOCKET WITH
1 SWITCH



16A 250V~
2 SOCKET WITH
1 SWITCH



13A 250V~
MULTI SOCKET WITH 1
SWITCH WITH 1 SOCKET



16A 250V~
1 SOCKET WITH
2 SWITCH



16A 250V~
2 SOCKET WITH
2 SWITCH



TV SOCKET

COMPUTER SOCKET



TELEPHONE SOCKET



DOUBLE TEL SOCKET OR
DOUBLE COMPUTER SOCKET



FAN DIMMER

D11 Series

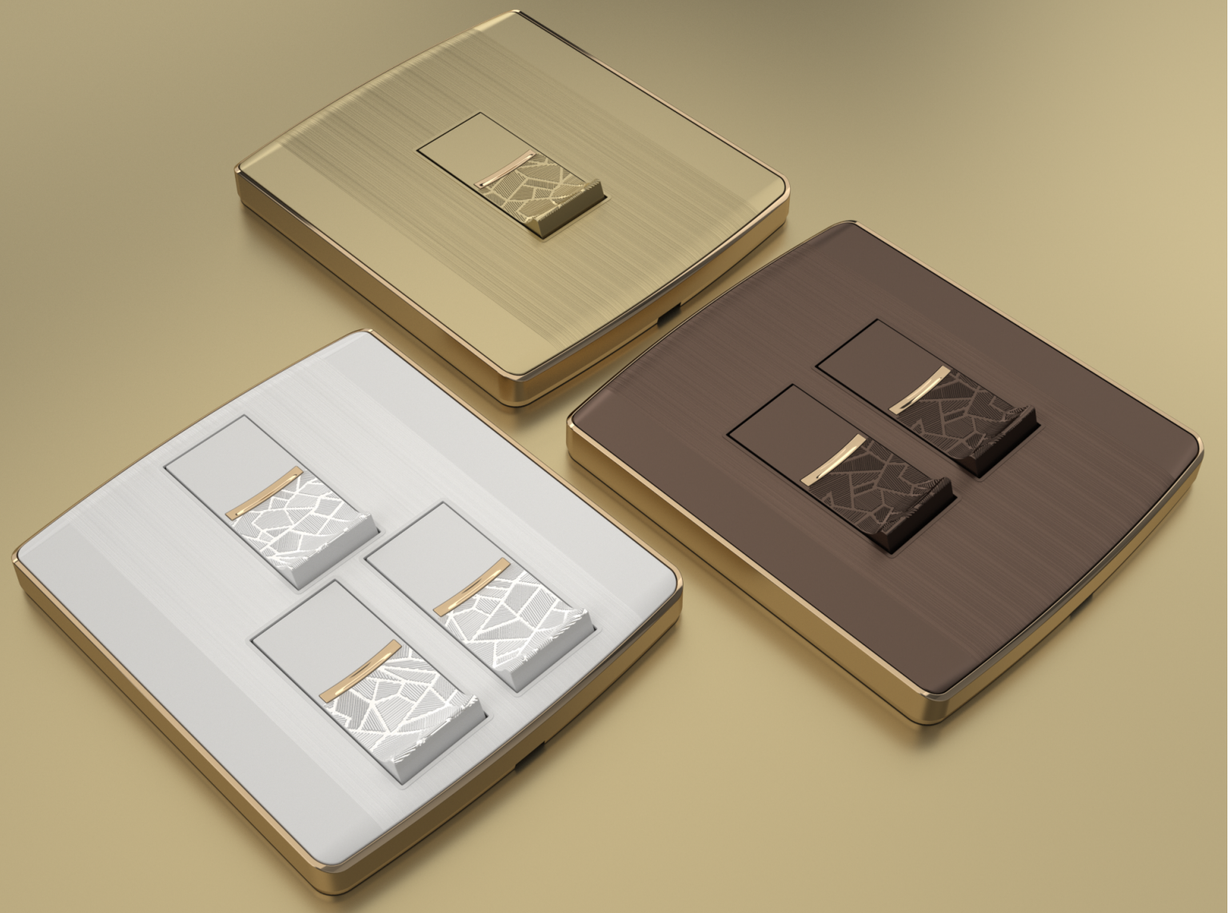

Flame Retardant
Stronger high temperature than general material
Strong corrosion resistance

Temperature 850 Degrees,
away from the fire 30 seconds, automatically put out,
protect the whole family electricity safety

16A 250V~
1 GANG 1 WAY SWITCH
1 GANG 2 WAY SWITCH

16A 250V~
2 GANG 1 WAY SWITCH
2 GANG 2 WAY SWITCH

16A 250V~
3 GANG 1 WAY SWITCH
3 GANG 2 WAY SWITCH

16A 250V~
4 GANG 1 WAY SWITCH
4 GANG 2 WAY SWITCH

20A 250V~
20A DP SWITCH

15A 250V~
POWER PLUG SOCKET WITH
SWITCH

13A 250V~
5 PIN MULTI SOCKET WITH
SWITCH

13A 250V~
5 PIN MULTI SOCKET WITH
SWITCH WITH 2 USB

TV SOCKET

TEL SOCKET

COMPUTER SOCKET

LIGHT DIMMER WITH NEON

C3 Series

16A 250V~
1 GANG 1 WAY SWITCH
1 GANG 2 WAY SWITCH

16A 250V~
2 GANG 1 WAY SWITCH
2 GANG 2 WAY SWITCH

16A 250V~
3 GANG 1 WAY SWITCH
3 GANG 2 WAY SWITCH

16A 250V~
4 GANG 1 WAY SWITCH
4 GANG 2 WAY SWITCH



20A 250V~
20A DP SWITCH

6A 250V~
BELL PUSH WATER PROOF

16A 250V~
2 PIN SOCKET WITH SWITCH

BLANK PLATE



15A 250V~
POWER PLUG SOCKET
WITH SWITCH



13A 250V~
MULTI SOCKET WITH SWITCH

13A 250V~
5 PIN SOCKET WITH SWITCH
WITH USB

13A 250V~
UNIVERSAL 5 In1

15A 250V~
POWER PLUG SOCKET
WITH SWITCH WITH NEON



13A 250V~
MULTI SOCKET WITH SWITCH
WITH NEON



13A 250V~
5 PIN SOCKET WITH SWITCH
WITH USB WITH NEON



13A 250V~
UNIVERSAL 5 In1 WITH
NEON

TV SOCKET

TEL SOCKET

COMPUTER SOCKET

LIGHT DIMMER WITH
SWITCH

16A 250V~
1 GANG 1 WAY SWITCH
1 GANG 2 WAY SWITCH

16A 250V~
2 GANG 1 WAY SWITCH
2 GANG 2 WAY SWITCH

16A 250V~
3 GANG 1 WAY SWITCH
3 GANG 2 WAY SWITCH

16A 250V~
4 GANG 1 WAY SWITCH
4 GANG 2 WAY SWITCH

16A 250V~
BELL SWITCH

16A 250V~
2 PIN SOCKET

16A 250V~
2 PIN SOCKET WITH
SWITCH

20A 250V~
20 DP SWITCH

45A 250V~
45 A/C SWITCH

15A 250V~
POWER PLUG SOCKET
WITH SWITCH

13A 250V~
MULTI SOCKET WITH
SWITCH

13A 250V~
5 PIN MULTI SOCKET WITH
SWITCH

13A 250V~
UNIVERSAL 5 IN 1

13A 250V~
5 PIN MULTI SOCKET WITH
SWITCH WITH USB

TV SOCKET

TEL SOCKET

COMPUTER SOCKET

TV SOCKET WITH TEL SOCKET

FAN DIMMER

FAN DIMMER WITH SWITCH

SR1 series



16A 250V~
1 GANG 1 WAY SWITCH
1 GANG 2 WAY SWITCH



16A 250V~
2 GANG 1 WAY SWITCH
2 GANG 2 WAY SWITCH



16A 250V~
3 GANG 1 WAY SWITCH
3 GANG 2 WAY SWITCH



16A 250V~
4 GANG 1 WAY SWITCH
4 GANG 2 WAY SWITCH



20A 250V~
20A DP SWITCH



6A 250V~
BELL PUSH WATER PROOF



16A 250V~
2 PIN SOCKET WITH
SWITCH



16A 250V~
4 PIN SOCKET



16A 250V~
2 PIN SOCKET WITH
2 SWITCH



15A 250V~
POWER PLUG SOCKET
WITH SWITCH



13A 250V~
MULTI SOCKET WITH
SWITCH

13A 250V~
10 PIN SOCKET WITH
SWITCH



TV SOCKET



TEL SOCKET



TV SOCKET WITH TEL SOCKET OR
COMPUTER SOCKET



LIGHT DIMMER SWITCH

SR2 series



16A 250V~
1 GANG 1 WAY SWITCH
1 GANG 2 WAY SWITCH



16A 250V~
2 GANG 1 WAY SWITCH
2 GANG 2 WAY SWITCH



16A 250V~
3 GANG 1 WAY SWITCH
3 GANG 2 WAY SWITCH



16A 250V~
4 GANG 1 WAY SWITCH
4 GANG 2 WAY SWITCH



20A 250V~
20A DP SWITCH

6A 250V~
BELL PUSH WATER PROOF



16A 250V~
2 PIN SOCKET WITH
SWITCH



16A 250V~
4 PIN SOCKET



16A 250V~
2 PIN SOCKET WITH
2 SWITCH



15A 250V~
POWER PLUG SOCKET
WITH SWITCH



13A 250V~
MULTI SOCKET WITH
SWITCH



13A 250V~
10 PIN SOCKET WITH
SWITCH



TV SOCKET



TEL SOCKET



TV SOCKET WITH TEL SOCKET OR
COMPUTER SOCKET

LIGHT DIMMER SWITCH

VENTILATOR

Sensuous Curves that Set Passion Alight
Constructed with state-of-the-art polycarbonate (PC) material, metal material,
tempered glass material, Concept is designed to withstand impact, heat and corrosion, making it totally safe and reliable.
Highly durable and scratch-proof

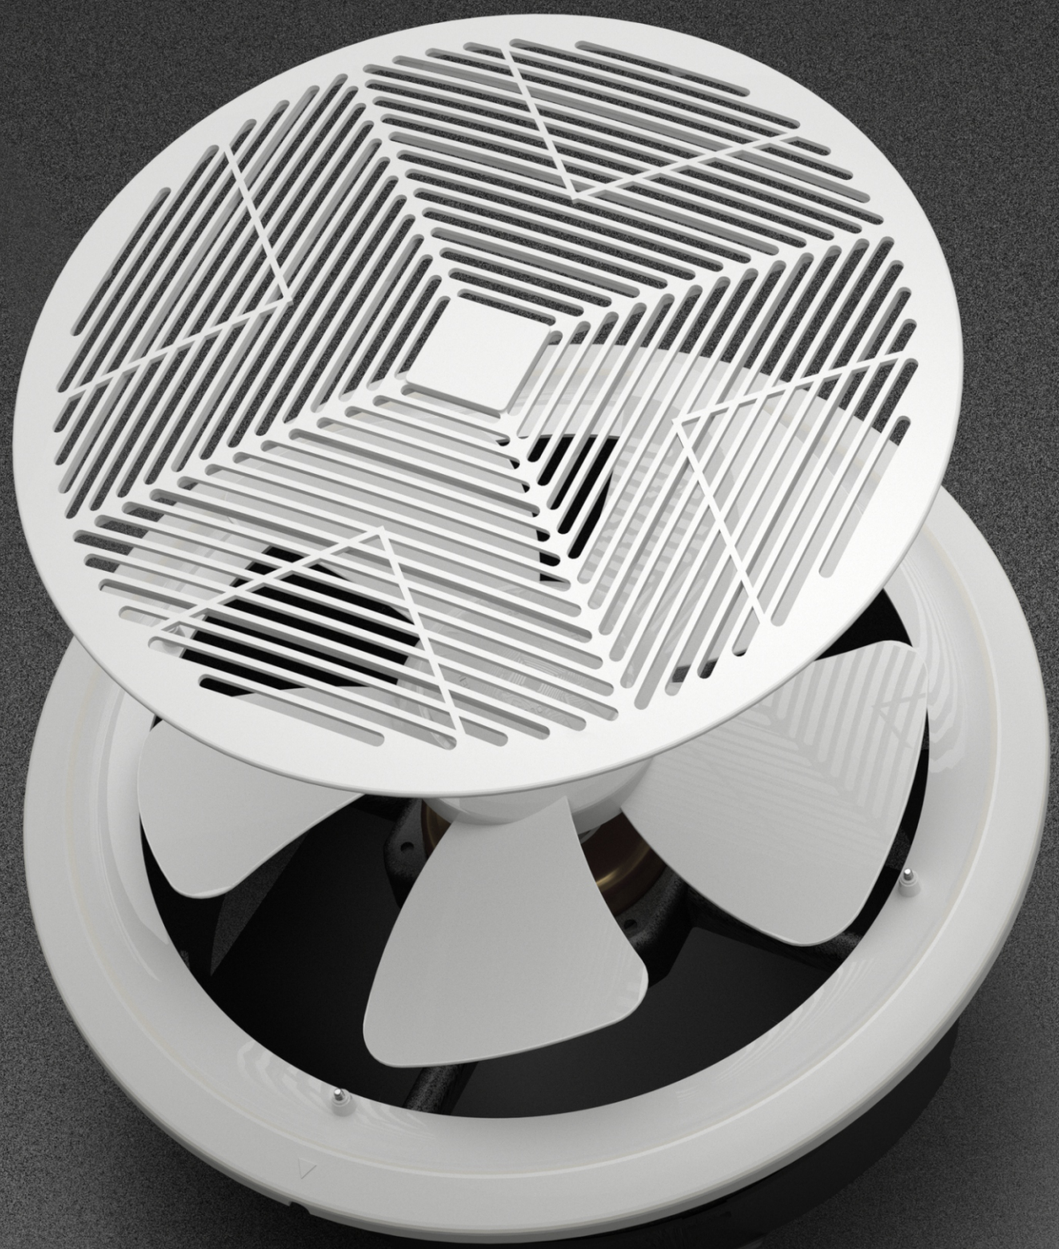

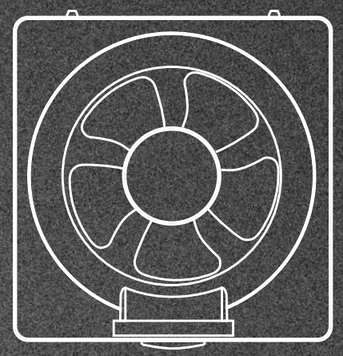

SRBPT-A(8INCH)

Voltage	240V/50Hz
Power	27W
Size	500x295x305mm
Airextraction	500m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

SRBPT-A(10INCH)

Voltage	240V/50Hz
Power	35W
Size	500x350x360mm
Airextraction	750m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅292mm
Minimum opening depth	195mm

SRBPT-B(8INCH)

Voltage	240V/50Hz
Power	27W
Size	500x296x305mm
Airextraction	500m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

SRBPT-B(10INCH)

Voltage	240V/50Hz
Power	35W
Size	500x350x360mm
Airextraction	750m³/h
IPrating	IPX4
Noise(dB)	≤52dB
Opening size	∅292mm
Minimum opening depth	195mm

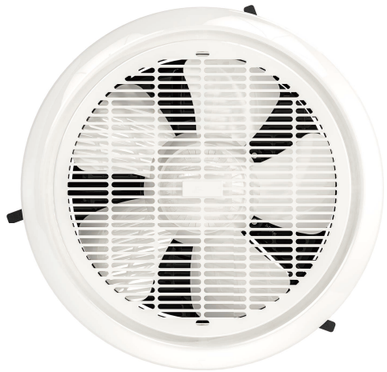

SRBPT-C(8INCH)

Voltage	240V/50Hz
Power	27W
Size	500x295x305mm
Airextraction	500m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

SRBPT-C(10INCH)

Voltage	240V/50Hz
Power	35W
Size	500x350x360mm
Airextraction	750m³/h
IPrating	IPX4
Noise(dB)	≤52dB
Opening size	∅292mm
Minimum opening depth	195mm

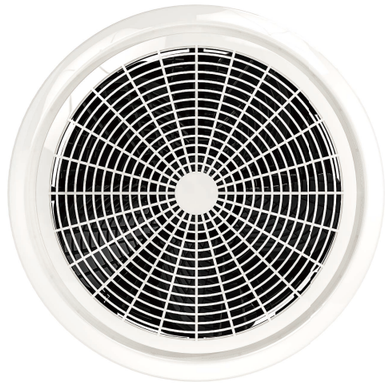

SRBPT-D(8INCH)

Voltage	240V/50Hz
Power	27W
Size	500x295x305mm
Airextraction	500m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

SRBPT-D(10INCH)

Voltage	240V/50Hz
Power	35W
Size	500x350x360mm
Airextraction	750m³/h
IPrating	IPX4
Noise(dB)	≤52dB
Opening size	∅292mm
Minimum opening depth	195mm

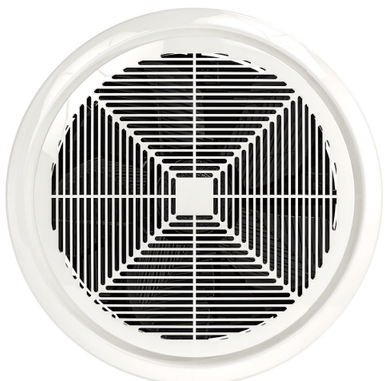

SRBPT-E(8INCH)

Voltage	240V/50Hz
Power	27W
Size	500x295x305mm
Airextraction	500m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

SRBPT-E(10INCH)

Voltage	240V/50Hz
Power	35W
Size	500x350x360mm
Airextraction	292m³/h
IPrating	IPX4
Noise(dB)	≤52dB
Opening size	∅292mm
Minimum opening depth	195mm

SRBPT-F(8INCH)

Voltage	240V/50Hz
Power	27W
Size	500x295x305mm
Airextraction	500m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

SRBPT-F(10INCH)

Voltage	240V/50Hz
Power	35W
Size	500x350x360mm
Airextraction	750m³/h
IPrating	IPX4
Noise(dB)	≤52dB
Opening size	∅292mm
Minimum opening depth	195mm

SRAPT-A(8INCH)

Voltage	240V/50Hz
Power	27W
Size	500x295x305mm
Airextraction	500m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

SRAPT-A(10INCH)

Voltage	240V/50Hz
Power	35W
Size	500x350x360mm
Airextraction	750m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅292mm
Minimum opening depth	195mm

SRAPT-B(8INCH)

Voltage	240V/50Hz
Power	27W
Size	500x295x305mm
Airextraction	500m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

SRAPT-B(10INCH)

Voltage	240V/50Hz
Power	35W
Size	500x350x360mm
Airextraction	750m³/h
IPrating	IPX4
Noise(dB)	≤52dB
Opening size	∅292mm
Minimum opening depth	195mm

SRAPT-C(8INCH)

Voltage	240V/50Hz
Power	27W
Size	500x295x305mm
Airextraction	500m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

SRAPT-C(10INCH)

Voltage	240V/50Hz
Power	35W
Size	500x350x360mm
Airextraction	750m³/h
IPrating	IPX4
Noise(dB)	≤52dB
Opening size	∅292mm
Minimum opening depth	195mm

SRAPT-D(8INCH)

Voltage	240V/50Hz
Power	27W
Size	500x295x305mm
Airextraction	500m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

SRAPT-D(10INCH)

Voltage	240V/50Hz
Power	35W
Size	500x350x360mm
Airextraction	750m³/h
IPrating	IPX4
Noise(dB)	≤52dB
Opening size	∅292mm
Minimum opening depth	195mm

SRAPT-E(8INCH)

Voltage	240V/50Hz
Power	27W
Size	500x295x305mm
Airextraction	500m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

SRAPT-E(10INCH)

Voltage	240V/50Hz
Power	35W
Size	500x350x360mm
Airextraction	292m³/h
IPrating	IPX4
Noise(dB)	≤52dB
Opening size	∅292mm
Minimum opening depth	195mm

SRAPT-F(8INCH)

Voltage	240V/50Hz
Power	27W
Size	500x295x305mm
Airextraction	500m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

SRAPT-F(10INCH)

Voltage	240V/50Hz
Power	35W
Size	500x350x360mm
Airextraction	750m³/h
IPrating	IPX4
Noise(dB)	≤52dB
Opening size	∅292mm
Minimum opening depth	195mm

SRAPB-A(8INCH)

Voltage	240V/50Hz
Power	27W
Size	500x295x305mm
Airextraction	500m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

SRAPB-B(8INCH)

Voltage	240V/50Hz
Power	27W
Size	500x295x305mm
Airextraction	500m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

SRAPB-C(8INCH)

Voltage	240V/50Hz
Power	27W
Size	500x295x305mm
Airextraction	500m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

SRAPB-D(8INCH)

Voltage	240V/50Hz
Power	27W
Size	500x295x305mm
Airextraction	500m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

SRAPB-E(8INCH)

Voltage	240V/50Hz
Power	27W
Size	500x295x305mm
Airextraction	500m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

SRAPB-F(8INCH)

Voltage	240V/50Hz
Power	27W
Size	500x295x305mm
Airextraction	500m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

EXHAUST TAN

Sensuous Curves that Set Passion Alight
Constructed with state-of-the-art polycarbonate (PC) material, metal material,
tempered glass material, Concept is designed to withstand impact, heat and corrosion, making it totally safe and reliable.
Highly durable and scratch-proof

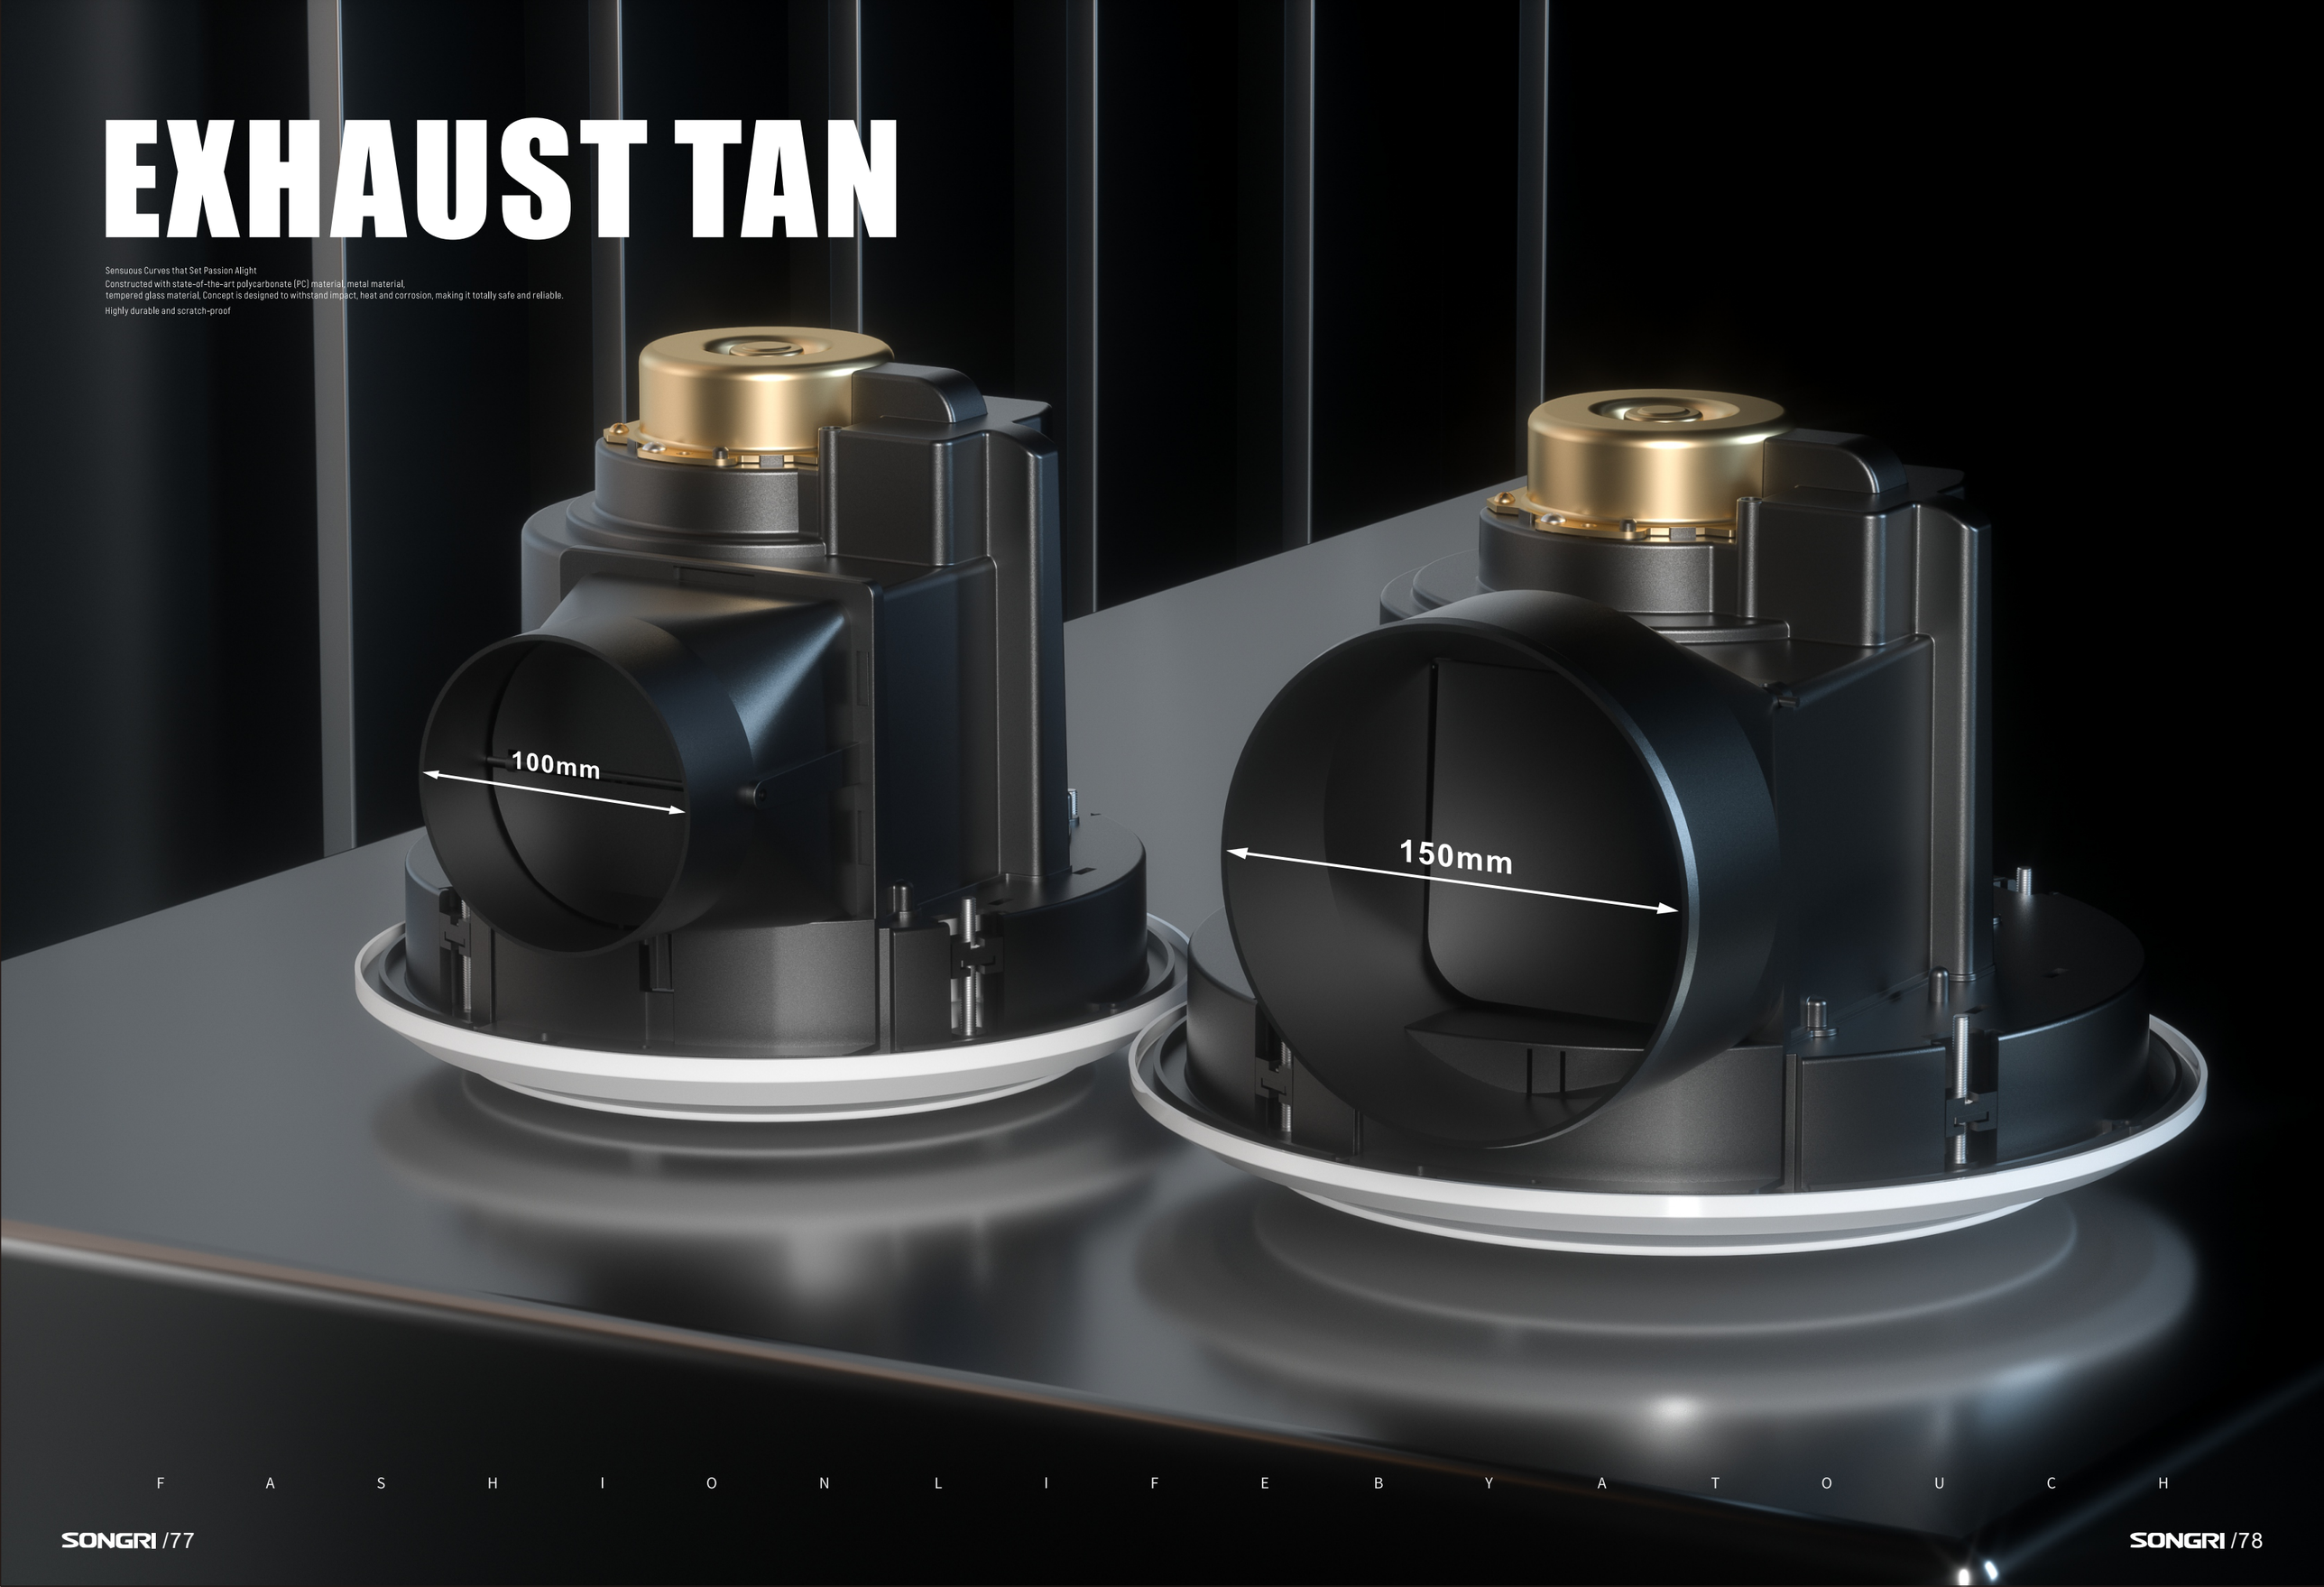

F A S H I O N L I F E B Y A T O U C H

LVXRD8PW-B(8INCH)

Voltage	240V/50Hz
Power	34W
Size	270x305x228mm
Airextraction	270m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

LVXRD10PW-B(10INCH)

Voltage	240V/50Hz
Power	58W
Size	325x361x230mm
Airextraction	450m³/h
IPrating	IPX4
Noise(dB)	≤60dB
Opening size	∅295mm
Minimum opening depth	195mm

LVXPD8PW-B(8INCH)

Voltage	240V/50Hz
Power	34W
Size	270x305x228mm
Airextraction	270m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

LVXPD10PW-B(10INCH)

Voltage	240V/50Hz
Power	58W
Size	325x361x230mm
Airextraction	450m³/h
IPrating	IPX4
Noise(dB)	≤60dB
Opening size	∅295mm
Minimum opening depth	195mm

LVXRD8SS(8INCH)

Voltage	240V/50Hz
Power	37W
Size	270x305x238mm
Airextraction	270m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

LVXRD10SS(10INCH)

Voltage	240V/50Hz
Power	57W
Size	325x361x241mm
Airextraction	450m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅295mm
Minimum opening depth	195mm

LVXRD8PW(8INCH)

Voltage	240V/50Hz
Power	37W
Size	270x305x238mm
Airextraction	270m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

LVXRD10PW(10INCH)

Voltage	240V/50Hz
Power	57W
Size	325x361x241mm
Airextraction	450m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅295mm
Minimum opening depth	195mm

VXRD8SS(8INCH)

Voltage	240V/50Hz
Power	37W
Size	270x305x238mm
Airextraction	270m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

VRXFS(10INCH)

Voltage	240V/50Hz
Power	57W
Size	325x361x241mm
Airextraction	450m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅295mm
Minimum opening depth	195mm

VXRD8PW(8INCH)

Voltage	240V/50Hz
Power	37W
Size	270x305x238mm
Airextraction	270m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

VXRD10PW(10INCH)

Voltage	240V/50Hz
Power	57W
Size	325x361x241mm
Airextraction	450m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅295mm
Minimum opening depth	195mm

LVXRD8PW-B(8INCH)

Voltage	240V/50Hz
Power	34W
Size	270x305x228mm
Airextraction	270m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	∅240mm
Minimum opening depth	195mm

LVXRD10PW-B(10INCH)

Voltage	240V/50Hz
Power	58W
Size	325x361x230mm
Airextraction	450m³/h
IPrating	IPX4
Noise(dB)	≤60dB
Opening size	∅295mm
Minimum opening depth	195mm

EXHAUST TAN

Sensuous Curves that Set Passion Alight

Constructed with state-of-the-art polycarbonate (PC) material, metal material, tempered glass material, Concept is designed to withstand impact, heat and corrosion, making it totally safe and reliable.

Highly durable and scratch-proof

BPT12-13A(A)

Voltage	220V/50Hz
Power	24W
Size	255x255x173mm
Airextraction	180m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	203x203mm
Minimum opening depth	158mm

BPT12-13A(F)

Voltage	220V/50Hz
Power	24W
Size	255x255x173mm
Airextraction	180m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	203x203mm
Minimum opening depth	158mm

BPT12-13A(B)

Voltage	220V/50Hz
Power	24W
Size	255x255x173mm
Airextraction	180m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	203x203mm
Minimum opening depth	158mm

BPT12-13A(G)

Voltage	220V/50Hz
Power	24W
Size	255x255x173mm
Airextraction	180m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	203x203mm
Minimum opening depth	158mm



BPT12-13A(C)

Voltage	220V/50Hz
Power	24W
Size	255x255x173mm
Airextraction	180m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	203x203mm
Minimum opening depth	158mm

BPT12-13A(H)

Voltage	220V/50Hz
Power	24W
Size	255x255x173mm
Airextraction	180m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	203x203mm
Minimum opening depth	158mm

BPT12-13A(D)

Voltage	220V/50Hz
Power	24W
Size	255x255x173mm
Airextraction	180m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	203x203mm
Minimum opening depth	158mm

BPT12-13A(I)

Voltage	220V/50Hz
Power	24W
Size	255x255x173mm
Airextraction	180m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	203x203mm
Minimum opening depth	158mm

BPT12-13A(E)

Voltage	220V/50Hz
Power	24W
Size	255x255x173mm
Airextraction	180m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	203x203mm
Minimum opening depth	158mm

BPT12-13A(J)

Voltage	220V/50Hz
Power	24W
Size	255x255x173mm
Airextraction	180m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	203x203mm
Minimum opening depth	158mm

BPT12-13A(K)

Voltage	220V/50Hz
Power	24W
Size	255x255x173mm
Airextraction	180m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	203x203mm
Minimum opening depth	158mm

BPT12-13B(D)

Voltage	220V/50Hz
Power	25W
Size	299x299x175mm
Airextraction	200m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	243x243mm
Minimum opening depth	161mm

BPT12-13A(L)

Voltage	220V/50Hz
Power	24W
Size	255x255x173mm
Airextraction	180m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	203x203mm
Minimum opening depth	158mm

BPT12-13B(E)

Voltage	220V/50Hz
Power	25W
Size	299x299x175mm
Airextraction	200m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	243x243mm
Minimum opening depth	161mm

BPT12-13B(A)

Voltage	220V/50Hz
Power	25W
Size	299x299x175mm
Airextraction	200m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	243x243mm
Minimum opening depth	161mm

BPT12-13B(F)

Voltage	220V/50Hz
Power	25W
Size	299x299x175mm
Airextraction	200m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	243x243mm
Minimum opening depth	161mm

BPT12-13B(B)

Voltage	220V/50Hz
Power	25W
Size	299x299x175mm
Airextraction	200m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	243x243mm
Minimum opening depth	161mm

BPT12-13B(C)

Voltage	220V/50Hz
Power	25W
Size	299x299x175mm
Airextraction	200m³/h
IPrating	IPX4
Noise(dB)	≤50dB
Opening size	243x243mm
Minimum opening depth	161mm

APB20A

Voltage	220V/50Hz
Power	30W
Size	300x300x131mm
Airextraction	500m³/h
IPrating	IPX4
Noise(dB)	≤45dB
Opening size	240x240mm
Minimum opening depth	135mm

APB25A

Voltage	220V/50Hz
Power	35W
Size	340x340x148mm
Airextraction	800m³/h
IPrating	IPX4
Noise(dB)	≤45dB
Opening size	288x288mm
Minimum opening depth	155mm

APB30A

Voltage	220V/50Hz
Power	40W
Size	400x400x148mm
Airextraction	1100m³/h
IPrating	IPX4
Noise(dB)	≤45dB
Opening size	340x340mm
Minimum opening depth	160mm

APB20B

Voltage	220V/50Hz
Power	30W
Size	300x300x148mm
Airextraction	500m³/h
IPrating	IPX4
Noise(dB)	≤45dB
Opening size	240x240mm
Minimum opening depth	135mm

APB25B

Voltage	220V/50Hz
Power	35W
Size	340x340x176mm
Airextraction	800m³/h
IPrating	IPX4
Noise(dB)	≤45dB
Opening size	288x248mm
Minimum opening depth	155mm

APB30B

Voltage	220V/50Hz
Power	40W
Size	400x400x174mm
Airextraction	1100m³/h
IPrating	IPX4
Noise(dB)	≤45dB
Opening size	340x340mm
Minimum opening depth	160mm

Sensuous Curves that Set Passion Alight

Constructed with state-of-the-art polycarbonate (PC) material, metal material, tempered glass material. Concept is designed to withstand impact, heat and corrosion, making it totally safe and reliable.

Highly durable and scratch-proof

flam Retardant,
High temperature resistance is not a general material can and, resistant to high.

Temperature 850 Degrees, away from the fire 30 seconds, automatically put Out, guard the whole family electricity safety.

APB20C

Voltage	220V/50Hz
Power	30W
Size	321x302x143mm
Airextraction	600m³/h
IPrating	IPX4
Noise(dB)	≤45dB
Opening size	241x241mm
Minimum opening depth	178mm

APB25C

Voltage	220V/50Hz
Power	37W
Size	369x350x131mm
Airextraction	900m³/h
IPrating	IPX4
Noise(dB)	≤45dB
Opening size	288x288mm
Minimum opening depth	160mm

APB30C

Voltage	220V/50Hz
Power	43W
Size	421x402x131mm
Airextraction	1200m³/h
IPrating	IPX4
Noise(dB)	≤45dB
Opening size	340x340mm
Minimum opening depth	176mm

APB20D

Voltage	220V/50Hz
Power	30W
Size	321x302x160mm
Airextraction	600m³/h
IPrating	IPX4
Noise(dB)	≤45dB
Opening size	241x241mm
Minimum opening depth	178mm



APB25D

Voltage	220V/50Hz
Power	37W
Size	369x350x161mm
Airextraction	900m³/h
IPrating	IPX4
Noise(dB)	≤45dB
Opening size	288x288mm
Minimum opening depth	160mm



APB30D

Voltage	220V/50Hz
Power	43W
Size	421x402x161mm
Airextraction	1200m³/h
IPrating	IPX4
Noise(dB)	≤45dB
Opening size	340x340mm
Minimum opening depth	176mm

APC13A(009)

Voltage	220V/50Hz
Power	12W
Size	150x150x92mm
Airextraction	40m³/h
IPrating	IPX4
Noise(dB)	≤35dB
Opening size	∅100mm
Minimum opening depth	82mm

APC13A(011)

Voltage	220V/50Hz
Power	15W
Size	180x180x101mm
Airextraction	80m³/h
IPrating	IPX4
Noise(dB)	≤35dB
Opening size	∅120mm
Minimum opening depth	90mm

APC13A(013)

Voltage	220V/50Hz
Power	21W
Size	208x208x107mm
Airextraction	200m³/h
IPrating	IPX4
Noise(dB)	≤35dB
Opening size	∅150mm
Minimum opening depth	95mm

APC13A(009D)

Voltage	220V/50Hz
Power	12W
Size	150x150x92mm
Airextraction	40m³/h
IPrating	IPX4
Noise(dB)	≤35dB
Opening size	∅100mm
Minimum opening depth	82mm

APC13A(011D)

Voltage	220V/50Hz
Power	15W
Size	180x180x101mm
Airextraction	80m³/h
IPrating	IPX4
Noise(dB)	≤35dB
Opening size	∅120mm
Minimum opening depth	90mm

APC13A(013D)

Voltage	220V/50Hz
Power	21W
Size	208x208x107mm
Airextraction	200m³/h
IPrating	IPX4
Noise(dB)	≤35dB
Opening size	∅150mm
Minimum opening depth	95mm

Switches & sockets

with color of your choice

Flame Retardant
Stronger high temperature than general material
Strong corrosion resistance

Temperature 850 Degrees,
away from the fire 30 seconds, automatically put out,
protect the whole family electricity safety

16A 3 gang shuko socket extension socket

with power line 3*1.5MM*1.8 meters

16A 3 gang shuko socket with 2 USB extension socket

with power line 3*1.5MM*1.8 meters

16A 4 gang shuko socket extension socket

with power line 3*1.5MM*1.8 meters

16A 4 gang shuko socket extension socket

with power line 3*1.5MM*1.8 meters

16A 3 gang shuko socket extension socket

with power line 3*1.5MM*1.8 meters

16A 3 gang shuko socket with 2 USB extension socket

with power line 3*1.5MM*1.8 meters

16A 4 gang shuko socket extension socket

with power line 3*1.5MM*1.8 meters

16A 5 gang shuko socket extension socket

with power line 3*1.5MM*1.8 meters

16A 3 gang shuko socket extension socket

with power line 3*1.5MM*1.8 meters

16A 3 gang shuko socket with 2 USB extension socket

with power line 3*1.5MM*1.8 meters

16A 4 gang shuko socket extension socket

with power line 3*1.5MM*1.8 meters

16A 4 gang shuko socket extension socket

with power line 3*1.5MM*1.8 meters

16A 4 gang shuko socket extension socket

with power line 3*1.5MM*1.8 meters

16A 3 gang shuko socket extension socket

with power line 3*1.5MM*1.8 meters

16A 3 gang shuko socket with 2 USB extension socket

with power line 3*1.5MM*1.8 meters

16A 4 gang shuko socket extension socket

with power line 3*1.5MM*1.8 meters

16A 5 gang shuko socket extension socket

with power line 3*1.5MM*1.8 meters

Switches & sockets

16A 5 gang multi socket extension socket

with power line 3*1.5MM*1.8 meters

16A 4 gang multi socket with 1 gang shuko socket extension socket

with power line 3*1.5MM*1.8 meters

16A 3 gang multi socket with 2 gang shuko socket extension socket

with power line 3*1.5MM*1.8 meters

16A 2 gang multi socket with 3 gang shuko socket extension socket

with power line 3*1.5MM*1.8 meters

16A 1 gang multi socket with 4 gang shuko socket extension socket

with power line 3*1.5MM*1.8 meters

16A 5 gang multi socket extension socket

with power line 3*1.5MM*1.8 meters

16A 4 gang shuko socket extension socket

with power line 3*1.5MM*1.8 meters

16A 5 gang shuko socket extension socket

with power line 3*1.5MM*1.8 meters

6 WAY DB BOX

Back Box.Material
1.Metal
2.Plastic

CODE NO.	PANEL SIZE	BACK BOX SIZE
632023	231X258X19mm	205X230X80mm

8 WAY DB BOX

Back Box.Material
1.Metal
2.Plastic

CODE NO.	PANEL SIZE	BACK BOX SIZE
632024	285X258X19mm	259X230X80mm

12 WAY DB BOX

Back Box.Material
1.Metal
2.Plastic

CODE NO.	PANEL SIZE	BACK BOX SIZE
632025	339X258X19mm	313X230X80mm

16 WAY DB BOX

Back Box.Material
1.Metal
2.Plastic

CODE NO.	PANEL SIZE	BACK BOX SIZE
632026	339X258X19mm	385.4X230X80mm

19 WAY DB BOX

Back Box.Material
1.Metal
2.Plastic

CODE NO.	PANEL SIZE	BACK BOX SIZE
632027	465X258X19mm	439.4X230X80mm

24 WAY DB BOX

Back Box.Material
1.Metal
2.Plastic

CODE NO.	PANEL SIZE	BACK BOX SIZE
632028	339X408X19mm	313X380X80mm